

# TVB-5405

**TruVision IP Bullet Camera, H.265/H.264, 5.0MPX , 2.8 to 12mm motorized lens, WDR, True D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, POE (802.3-af) /12VDC,**

## Overview

The TruVision line of IP bullet form factor cameras leverages the latest H.265 video compression technology to bring state-of-the-art, high-definition pictures to the mass video surveillance market. With camera resolutions of 2, 3, or 5 megapixel, these IP cameras represent a flexible video surveillance device to meet any need. Equipped with advanced technology and signal processing capability, they effectively capture video under challenging conditions.

TruVision cameras utilize H.264 and/or H.265 compression technology with triple-streaming capability, making it easy to manage the camera's bandwidth usage. Motorized varifocal lens technology allows the user to remotely adjust the varifocal lens length and focus the camera with the touch of a button. Select models feature Super Low Light technology, which provides a clear image in low lighting conditions with a minimum of "grainy" interference. Recording to a local MicroSD card (not included) protects data in the event of network disruptions.

These cameras go above and beyond standard motion detection with enhanced alarm capabilities, including cross lines, intrusion, de-focus and face detection features. Each is user-configurable to best suit the installation environment. A Region of Interest function ensures specific portions of an image are given priority during instances of high network traffic or network degradation.

Location-specific functions include a Hallway View Mode to provide a portrait view of a hallway or corridor, a De-Fog Mode to help resolve images through fog or rain and Electronic Image Stabilization for installations subject to physical vibration or shaking.



## Details

- Maximum Resolution: 2592 × 1944
- Maximum Real Time Resolution: 2592 × 1944 @ 25 fps
- Designed to PSIA and ONVIF Profile G and S open standards
- H.265 and/or H.264 compression with triple-streaming functionality
- Edge recording up to 128GB SDHC card
- 1/1.8" CMOS image sensor
- Motorized IR Cut Filter
- Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux IR ON
- Motorized Lens 2.8 to 12mm
- Up to 50m IR illumination
- Digital Wide Dynamic Range
- Intelligence (Face detection, Audio Exception Detection, Intrusion Detection, De-focus Detection, Region of Interest (ROI), Electronic Image Stabilization (EIS), Defog, Scene Change Detection, Cross Line Detection, Advanced Motion Detection, Region Entrance Detection, Region ExitDetection, Object Removal, Object Left Behind, Object Counting)

# TVB-5405

TruVision IP Bullet Camera, H.265/H.264, 5.0MPX , 2.8 to 12mm motorized lens, WDR, True D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, POE (802.3-af) /12VDC,

## Technical specifications

### Camera

|  |   |
|--|---|
| Max. resolution                                  | 5 MPX   |
| Sensor scan                                      | Progressive   |
| Sensor type                                      | CMOS  |
| Total Pixels (H x V)                             | 2688 x 1520   |
| Effective pixels (H x V)                         | 2688 x 1520   |
| Sensor:  | 5 MPX 1/1.8" Progressive Scan CMOS  |
| Day/Night:                                       | Motorized IR Cut Filter   |
| IP   | H.265/ H.264 / MJPEG  |
| Compression/Standard:                            |   |
| Maximum Resolution (@ 2592 x 1944 (25 fps) FPS): |   |
| Maximum Real Time Resolution (@ FPS):            | 50Hz: 25fps (2592 x 1944, 2560 x 1920, 2048 x 1536), 50fps (1920 x 1080, 1280 x 960, 1280 x 720)<br>60Hz: 30fps (2592 x 1944, 2560 x 1920, 2048 x 1536), 60fps(1920 x 1080, 1280 x 960, 1280 x 720) |
| Multiple Streaming:                              | Triple Streams  |
| Video Bit Rate:                                  | 128 Kbps to 16 Mbps, adjustable   |
| S/N Ratio:                                       | 52 dB (AGC OFF)   |
| Auto Exposure (shutter):                         | 50 Hz: 1/3s to 1/100,000s<br>60 Hz: 1/3s to 1/100,000s  |
| Composite Output (BNC):                          | Yes   |

### Lighting performance

|                              |   |
|------------------------------|---|
| WDR type                     | Digital WDR                                   |
| Digital noise reduction      | 3D DNR  |
| Day/night                    | True Day/Night                                |
| Motorized IR cut filter      | Yes   |
| Color sensitivity            | 0.01 Lux @ (F1.2, AGC ON)                     |
| B/W sensitivity              | 0 lux with IR on                              |
| Infrared (IR)                | Yes   |
| IR sensitivity               | 0 lux with IR                                 |
| IR range                     | Up to 50 m                                    |
| IR wavelength                | 850 nm  |
| Wide Dynamic Range           | DWDR  |
| WDR in dB                    | No  |
| Digital noise reduction      | 3D DNR  |
| Highlight compensation (HLC) | No  |
| Day/Night                    | True D/N                                      |
| Motorized IR Cut Filter      | Yes   |
| Color sensitivity            | Color: 0.01 Lux @ (F1.2, AGC ON), 0 Lux IR ON |
| IR Range                     | Up to 50 m                                    |
| IR Wavelength                | 850nm   |

### Encoding

|                         |   |
|-------------------------|---|
| Sub stream compression  | H.264, MJPEG  |
| Video bit rate          | 128kbps to 16Mbps                                   |
| Main stream resolutions | 2688 x 1520   |
| Sub stream resolutions  | 176 x 144 (QCIF), 352 x 288 (CIF), 704 x 576 (4CIF) |
| Max. resolution @ fps   | 2592 x 1944 @ 25 fps                                |

### Lens

|  |                     |
|--|---------------------|
| Lens type  | Varifocal motorized |
| Focal length                                       | 2.8 to 12 mm        |
| Auto iris  | Yes                 |
| Auto focus   | Yes                 |
| Motorized zoom                                     | Yes                 |
| Control type:                                      | DC                  |
| Focal length:                                      | 2.8 to 12mm         |
| Actually measured view "Horizontal View Angle(°)": | 74.6 - 26.8         |
| Actually measured view "Vertical View Angle(°)":   | 51 - 20             |
| Zoom lens:   | Motorized           |
| Autofocus:   | Yes                 |
| Auto Iris:   | Yes                 |

### Network

|                             |   |
|-----------------------------|---|
| Integration                 | CGI, ONVIF, PSIA  |
| Supported network protocols | 802.1x, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, IPv4, IPv6, NTP, PPPoE, QoS, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP               |
| Network Protocols:          | TCP/IP, HTTP, DHCP, DNS, DDNS, ezDDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, QoS, IPv6. ONVIF, PSIA, CGI |
| PoE IEEE:                   | 802.3at   |
| Standard & Integration      | ONVIF Profile (G,S), PSIA, CGI  |

### Audio

|                   |                              |
|-------------------|------------------------------|
| Audio compression | G.711, G.722.1, G.726, MP2L2 |
| Audio in          | 1                            |
| Audio out         | 1                            |

### Alarm I/O

|                      |               |
|----------------------|---------------|
| Alarm inputs         | 1             |
| Alarm outputs        | 1             |
| Alarm I/O connection | Terminal Type |

### Storage

|                       |                                       |
|-----------------------|---------------------------------------|
| Local storage support | Yes                                   |
| Local storage type    | Built-in Micro SD/SDHC/SDXC card slot |
| Max. storage capacity | 128GB                                 |

# TVB-5405

TruVision IP Bullet Camera, H.265/H.264, 5.0MPX , 2.8 to 12mm motorized lens, WDR, True D/N, 50m IR, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, POE (802.3-af) /12VDC,

## Video intelligence

|                 |   |
|-----------------|---|
| Alarm trigger   | Motion detection, Privacy Masking, Video tampering  |
| Video analytics | Advanced motion detection, Audio exception detection, Line crossing detection, De-focus, Defog, Electronic Image Stabilization (EIS), Face detection, Intrusion detection, Object counting, Object left behind, Object removal detection, Region entrance detection, Region exiting detection, Scene change |

## General

|                        |   |
|------------------------|---|
| Technology             | IP  |
| Display modes          | Hallway View, Mirror, ROI (Region Of Interest)              |
| Video output           | BNC Composite PAL / NTSC                                    |
| Software compatibility | OnGuard, Prism, TruVision Navigator, TVRmobile, Web Browser |

## Electrical

|                     |  |
|---------------------|--|
| Power supply type   | VDC  |
| Power supply value  | 12 VDC                                     |
| Power consumption   | 13 W                                       |
| Current consumption | 1.083 A                                    |
| Voltage Input:      | 12VDC, PoE (802.3af / 802.3at with heater) |
| Power Consumption:  | 13 W                                       |
| Current:            | 1083 mA                                    |
| Auxiliary Power     | 50mA @12VDC Line level                     |

## Physical

|                     |              |
|---------------------|--------------|
| Physical dimensions | 116 x 292 mm |
| Net weight          | 1.6 kg       |
| Colour              | Grey         |
| Form Factor         | Bullet       |

## Environmental

|                       |                               |
|-----------------------|-------------------------------|
| Vandal proof          | No                            |
| Operating temperature | -40 to +60°C<br>-40 to +140°F |
| Environment           | Outdoor                       |
| IP rating             | 66                            |

## Regulatory

|            |                                      |
|------------|--------------------------------------|
| Compliance | CE, FCC, HALT, REACH, RoHS, UL, WEEE |
|------------|--------------------------------------|

## LocalStorage

|                           |   |
|---------------------------|---|
| Media:                    | MicroSD/micro SDHC/ microSDXC           |
| Capacity:                 | Up to 128GB                             |
| Input:                    | Audio in / Mic in (line level)          |
| Output:                   | Audio out                               |
| Audio bit rate (protocol) | G.711ulaw, G.711alaw, MP2L2, G.726, PCM |

## Camera Alarm

|               |   |
|---------------|---|
| Basic:        | Motion Detection, Tamper Proof, Privacy Mask  |
| Advanced:     | Face detection, Audio Exception Detection, Intrusion Detection, De-focus Detection, Region of Interest (ROI), Electronic Image Stabilization (EIS), Defog, Scene Change Detection |
|               | Cross Line Detection, Advanced Motion Detection, Region Entrance Detection, Region Exit Detection, Object Removal, Object Left Behind, Object Counting                            |
| Input/Output: | 1 input / 1 output  |

## Display

|               |     |
|---------------|-----|
| Display mode: | N/A |
| OSD:          | N/A |

## Mechanical/ Environmental


|                        |  |
|------------------------|--|
| Camera type:           | Bullet                                       |
| Dimensions:            | Ø 115.8 × 291.8 mm (4.6 × 11.5 in.)          |
| Weight:                | 1600 g (3.53 lbs.)                           |
| Storage Temperature:   | -40 to +60 °C (-40 to +140 °F)               |
| Operating Temperature: | -40 to +60°C (-40 to +140°F), with heater on |
| Environmental Rating:  | IP66   |
| Vandal Rating:         | No   |
| Outdoor:               | Yes  |

## Regulation

|             |                                |
|-------------|--------------------------------|
| Compliance: | FCC, CE, UL, WEEE, RoHS, REACH |
|-------------|--------------------------------|

## Accessories

|           |    |
|-----------|----|
| Brackets: | No |
|-----------|----|

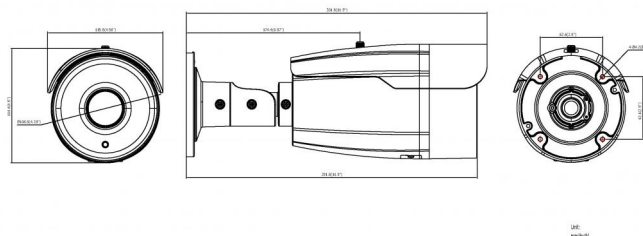

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 20 November 2019 - 16:51