Product data sheet



TVT-2403

TruVision 5 MPX HD-TVI Turret camera, 2.8 mm fixed lens - PAL

Overview

TruVision HD-TVI Turret Cameras from Interlogix deliver cost-effective surveillance with 5 MPx resolution HD-TVI technology over existing coaxial cable. Ideal for new or existing projects, HD-TVI bullet cameras are quick and easy to install and can help users stay within budget constraints without compromising security needs.

With the ability to see in low-light conditions, HD-TVI Turret cameras provide color images by day and black-and-white images in night-time applications; in conjunction with IR illumination.

These cameras are specifically designed for use with TruVision HD-TVI DVRs that support 5MPx resolutions. Support for 5 MPx resolution is limited to specific BNC ports, based on the recorder. Refer to the TruVision HD-TVI recorder guidelines for more details. Please note that first generation TruVision HD-TVI DVRs will not support these cameras.



Details

- 5MPx HD-TVI resolution
- Motorized 2.8mm fixed lens
- HD-TVI technology for transmitting high quality video over existing coax cable
- TruVision over-the-coax support for efficient remote access to local camera OSD menu and lens configuration
- Digital Wide Dynamic Range (DWDR)
- Built-in IR-illuminators to cover low light scenes up to 20m, including Smart IR function to optimize IR illumination
- IP67 rating for optimal outdoor use
- Multiple mounting options, including Turret mounting plate
- Cable protection/management

TruVision 5 MPX HD-TVI Turret camera, 2.8 mm fixed lens - PAL

Technical specifications

5 MPX
Progressive
CMOS
2592 x 1944
>62dB
NTSC: 1/30 s to 1/50,000 s; PAL: 1/25 s to 1/50,000 s

Lig	hting	performance

WDR type	Digital WDR
WDR	DWDR
Day/night	True Day/Night
Motorized IR cut filter	Yes
B/W sensitivity	0.01 lux @ f1.2 (AGC On); 0 lux with IR
Infrared (IR)	Yes
IR range	20m

Encoding

Main stream resolutions	1920 x 1080 (1080p), 2592 x 1944
Max. resolution @ fps	2560 (H) × 1944 (V) @ 12.5 fps

Lens

Lens type	Fixed
Focal length	2.8mm
Auto focus	No
Motorized zoom	No

Video intelligence

Video analytics

General	
Technology	HD-TVI analog
Video standard	PAL
Display modes	Mirror
Video output	BNC Composite

Defect pixel correction, Smart IR

Electrical

Operating voltage	12VDC
Power supply type	12 VDC
Power consumption	3W (Max.)
Current consumption	250mA


Physical

,	
Physical dimensions	5 × 3.85 in.
	126.7 × 97.84mm
Net weight	0.77 lbs.
	350g
Colour	Grey (Pantone 428c)
Form Factor	Turret

Environmental

Vandal proof	No
Operating temperature	-40°~60°
	-40°F~140°F
Cold start temperature	-40°~60°
	-40°F~140°F
Relative humidity	<90% (non-condensing)
Environment	Indoor, Outdoor
IP rating	IP67

Regulatory

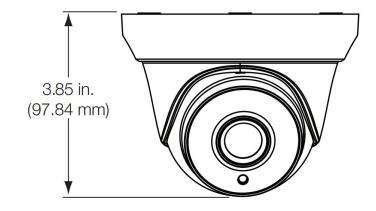

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

